





YAOHUA

A22

Platform Scale Indicator



Double display

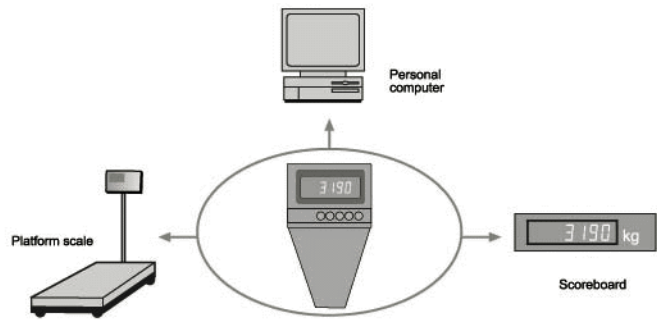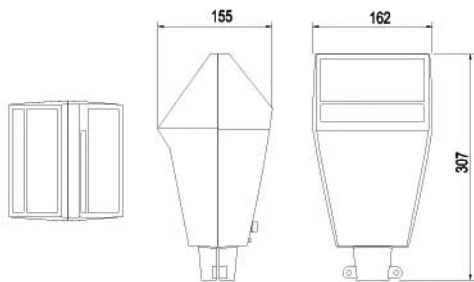

Introduction:

Weighing indicator XK3190-A22 is a double display indicator which is widely applied in electronic platform scale, floor scale, and so on alike static weighing system equipped with 1~4 load cell.

Feature:

- ◆ Double display
- ◆ The back side display can be turned off
- ◆ Standard RS232 interface to connect scoreboard
- ◆ AC/DC power supply, built-in rechargeable 6V/4AH battery

Standard Function:

- ◆ Counting and accumulating
- ◆ High precision A/D conversion with readability 1/30000
- ◆ Able to set zero-tracking range, zero (auto/manual) range
- ◆ KG/LB switch

Technical Parameter:

- ◆ Input signal range: -10mV~15mV
- ◆ Load cell excitation: DC 5V; $I \leq 150\text{mA}$
- ◆ Max connection number of load cell: 4 at 350 ohm
- ◆ Load cell connection mode: 6 wire, auto-compensation for long distance
- ◆ Verified counts: 3000
- ◆ Double display, 6 bits LED, 8 status indications
- ◆ Display range: -99990 ~ 99990 (d=10)
- ◆ Scoreboard interface (optional)
- ◆ Serial sending by RS232 with baud rate 1200
- ◆ Transmission distance ≤ 30 meters
- ◆ Communication interface (optional)
- ◆ RS232c interface with selectable baud rate, continuous sending method or on command method
- ◆ Transmission distance ≤ 30 meters
- ◆ Power supply : AC 187 ~ 242V; 49-51Hz
DC 6V/4Ah battery